



# APoE-2405

## 24V Passive PoE Adapter

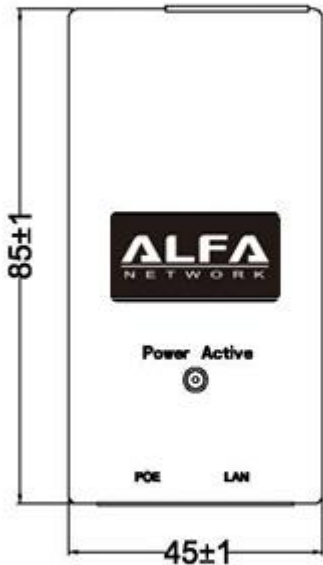

Available AC Power Code:



USA version




EU version



AU version



UK version



RJ45 Output(Data & Power)		
Pin	Symbol	Description
1	Rx+	Data Receive
2	Rx-	Data Receive
3	Tx+	Data Transmit
4	-Vdc_return(+)	Feeding Power(+)
5	-Vdc_return(+)	Feeding Power(+)
6	Tx-	Data Transmit
7	-Vdc	Feeding Power(-)
8	-Vdc	Feeding Power(-)

# APoE-2405

## 24V Passive PoE Adapter

### Specification:

Model	APoE-2405
Output Voltage	24V
Output Current	500mA
Input Voltage	90~264Vac Maximum
Input Frequency	47~63Hz
Input Current	0.3A Maximum
Inrush Current	30A Maximum
Ripple	240mV Maximum
Hold-Up Time	10ms
Over Current Protection	Auto Recovery
MTBF	50,000H(at 25°C)
Short-circuit Protection	Auto Recovery
Operating Temperature	0~40°C
Storage Temperature	-20~+85°C
Relative Humidity	5%-90%
Safety	CE / FCC

#### For further details:

Alfa Network Inc.,

4F-1 No. 106, Rueiguang Rd., Neihu District, Taipei City, Taiwan.

<http://www.alfa.com.tw> | [sales@alfa.com.tw](mailto:sales@alfa.com.tw)

Tel:+886-2-27968477 | Fax:+886-2-27968478

Copyright 2009 Alfa Networks Inc. All Rights Reserved

Changes to specifications and descriptions may change at any time without prior notice